


金属快插接头

QPC系列

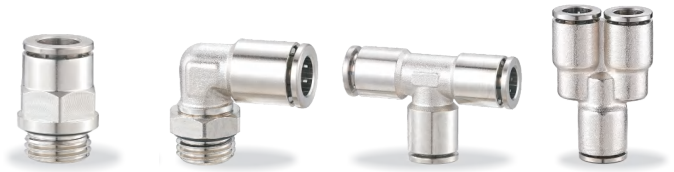

技术参数

材料	镀镍黄铜基体及槽夹头，丁腈橡胶O型圈
使用压力范围(MPa)	0.095~2.5
环境及流体温度	-30~100℃(最高瞬间温度100℃)
工作介质	压缩空气
适用软管材质	尼龙、软尼龙、PU聚氨酯、PE聚乙烯

选型表

系列	代码	QPC	-	-	-	-	-	涂胶	代码
金属快插接头	QPC							无密封胶	-
接头类别	代码							涂有密封胶	H
管子尺寸	代码							材质	代码
ø4	04							全铜	A
ø6	06							不锈钢304	B
ø8	08							不锈钢316	C
ø10	10							接头尺寸	代码
ø12	12							R1/8	01
ø14	14							R1/4	02
ø16	16							R3/8	03
								R1/2	04
								R3/4	06
								M5*0.8	M5
								G1/8	01G
								G1/4	02G
								G3/8	03G
								G1/2	04G
								G3/4	06G

型号

QPC-D 直通外螺纹接头



型号			
管径(公制)-螺纹(R/G)			
QPC-D-04-M5-A	QPC-D-06-04(G)-A	QPC-D-10-03(G)-A	QPC-D-14-04(G)-A
QPC-D-04-01(G)-A	QPC-D-08-01(G)-A	QPC-D-10-04(G)-A	QPC-D-16-03(G)-A
QPC-D-04-02(G)-A	QPC-D-08-02(G)-A	QPC-D-12-01(G)-A	QPC-D-16-04(G)-A
QPC-D-06-M5-A	QPC-D-08-03(G)-A	QPC-D-12-02(G)-A	QPC-D-16-06-A
QPC-D-06-01(G)-A	QPC-D-08-04(G)-A	QPC-D-12-03(G)-A	
QPC-D-06-02(G)-A	QPC-D-10-01(G)-A	QPC-D-12-04(G)-A	
QPC-D-06-03(G)-A	QPC-D-10-02(G)-A	QPC-D-14-03(G)-A	

QPOC-D 圆柱内六角接头



型号			
管径(公制)-螺纹(R/G)			
QPOC-D-04-M5-A	QPOC-D-06-01(G)-A	QPOC-D-10-02(G)-A	QPOC-D-12-04(G)-A
QPOC-D-04-01(G)-A	QPOC-D-08-01(G)-A	QPOC-D-10-03(G)-A	
QPOC-D-06-M5-A	QPOC-D-08-02(G)-A	QPOC-D-12-02(G)-A	
QPOC-D-06-01(G)-A	QPOC-D-08-03(G)-A	QPOC-D-12-03(G)-A	

QPC-L 直角外螺纹接头



型号			
管径(公制)-螺纹(R/G)			
QPC-L-04-M5-A	QPC-L-06-04(G)-A	QPC-L-10-03(G)-A	QPC-L-14-04(G)-A
QPC-L-04-01(G)-A	QPC-L-08-01(G)-A	QPC-L-10-04(G)-A	QPC-L-16-03(G)-A
QPC-L-04-02(G)-A	QPC-L-08-02(G)-A	QPC-L-12-01(G)-A	QPC-L-16-04(G)-A
QPC-L-06-M5-A	QPC-L-08-03(G)-A	QPC-L-12-02(G)-A	QPC-L-16-06-A
QPC-L-06-01(G)-A	QPC-L-08-04(G)-A	QPC-L-12-03(G)-A	
QPC-L-06-02(G)-A	QPC-L-10-01(G)-A	QPC-L-12-04(G)-A	
QPC-L-06-03(G)-A	QPC-L-10-02(G)-A	QPC-L-14-03(G)-A	

QPCF-D 直通内螺纹接头



型号			
管径(公制)-螺纹(R/G)			
QPCF-D-04-M5-A	QPCF-D-06-02-A	QPCF-D-08-03-A	QPCF-D-10-04-A
QPCF-D-04-01-A	QPCF-D-06-03-A	QPCF-D-08-04-A	QPCF-D-12-01-A
QPCF-D-04-02-A	QPCF-D-06-04-A	QPCF-D-10-01-A	QPCF-D-12-02-A
QPCF-D-06-M5-A	QPCF-D-08-01-A	QPCF-D-10-02-A	QPCF-D-12-03-A
QPCF-D-06-01-A	QPCF-D-08-02-A	QPCF-D-10-03-A	QPCF-D-12-04-A

QPCH-D 直通穿板接头



型号			
管径(公制)-螺纹(R/G)			
QPCH-D-04-A	QPCH-D-08-A	QPCH-D-12-A	QPCH-D-16-A
QPCH-D-06-A	QPCH-D-10-A	QPCH-D-14-A	

QPC-T T型三通中部螺纹接头



型号			
管径(公制)-螺纹(R/G)			
QPC-T-04-M5-A	QPC-T-06-04(G)-A	QPC-T-10-03(G)-A	QPC-T-14-04(G)-A
QPC-T-04-01(G)-A	QPC-T-08-01(G)-A	QPC-T-10-04(G)-A	QPC-T-16-02G-A
QPC-T-04-02(G)-A	QPC-T-08-02(G)-A	QPC-T-12-01(G)-A	QPC-T-16-03(G)-A
QPC-T-06-M5-A	QPC-T-08-03(G)-A	QPC-T-12-02(G)-A	QPC-T-16-04(G)-A
QPC-T-06-01(G)-A	QPC-T-08-04(G)-A	QPC-T-12-03(G)-A	
QPC-T-06-02(G)-A	QPC-T-10-01(G)-A	QPC-T-12-04(G)-A	
QPC-T-06-03(G)-A	QPC-T-10-02(G)-A	QPC-T-14-03(G)-A	

QPCE-T T型三通接头



型号			
管径(公制)-螺纹(R/G)			
QPCE-T-04-A	QPCE-T-08-A	QPCE-T-12-A	QPCE-T-16-A
QPCE-T-06-A	QPCE-T-10-A	QPCE-T-14-A	

QPCG-T T型三通变径接头



型号			
管径(公制)-螺纹(R/G)			
QPCG-T-04-06-A	QPCG-T-06-10-A	QPCG-T-08-12-A	QPCG-T-12-16-A
QPCG-T-06-08-A	QPCG-T-08-10-A	QPCG-T-10-12-A	QPCG-T-14-16-A

QPFJ 变径快插接头



型号			
管径(公制)-螺纹(R/G)			
QPGJ-04-06-A	QPGJ-06-08-A	QPGJ-08-10-A	QPGJ-10-14-A
QPGJ-04-08-A	QPGJ-06-10-A	QPGJ-10-12-A	QPGJ-12-14-A

QPC-Y Y型三通接头



型号			
管径(公制)-螺纹(R/G)			
QPC-Y-04-A	QPC-Y-08-A	QPC-Y-12-A	QPC-Y-16-A
QPC-Y-06-A	QPC-Y-10-A	QPC-Y-14-A	

QPCG-Y Y型三通变径接头



型号			
管径(公制)-螺纹(R/G)			
QPCG-Y-06-04-A	QPCG-Y-08-06-A	QPCG-Y-10-06-A	QPCG-Y-10-08-A
QPCG-Y-8-10-A	QPCG-Y-10-12-A		

QPCV-L 直角快插接头



型号			
管径(公制)-螺纹(R/G)			
QPCV-L-04-A	QPCV-L-08-A	QPCV-L-12-A	QPCV-L-16-A
QPCV-L-06-A	QPCV-L-10-A	QPCV-L-14-A	

QPCE-D 直通接头



型号			
管径(公制)-螺纹(R/G)			
QPCE-D-04-A	QPCE-D-08-A	QPCE-D-12-A	QPCE-D-16-A
QPCE-D-06-A	QPCE-D-10-A	QPCE-D-14-A	

QPCG-D 直通变径接头



型号			
管径(公制)-螺纹(R/G)			
QPCG-D-04-06-A	QPCG-D-06-08-A	QPCG-D-08-10-A	QPCG-D-10-12-A
QPCG-D-04-08-A	QPCG-D-06-10-A	QPCG-D-08-12-A	QPCG-D-12-16-A
QPCG-D-14-16-A			